# OPTIMAX<sup>TM</sup> 365

### Rechargeable LED UV-A Flashlight

**OPX-365** 

 Nominal steady-state UV-A (365 nm) intensity of 18,000 µW/cm<sup>2</sup> at 15 in (38 cm)

Low visible light emission less than 2 foot-candles (22 lux)



Rechargeable NiMH Battery



Bright & Uniform Beam



Instant-On Operation 90mins P

PERFECT for small space inspections while out in the field

> 90 Minutes Run Time

R

ANODIZED ALUMINUM ..... LAMP BODY Minimizes corrosion and stands up to years of heavy use

#### CONVENIENT ON/OFF SWITCH

For easy one-handed operation

CHARGE STATUS INDICATOR LIGHT ELECTRONIC INTENSITY STABILIZER Assures consistent performance

- Electronic Intensity Stabilizer ensures consistent performance. Beam strength will not weaken between charges!
- Instant-on operation; lamp reaches full power immediately
- Portable and rugged. Anodized aluminum lamp body minimizes corrosion and stands up to years of heavy use.
- Powered by a rechargeable NiMH battery. Provides 90 minutes of continuous inspection between charges.

| MODEL               | NOMINAL STEADY-STATE<br>UV-A INTENSITY<br>at 15 in (38 cm) <b>①</b> | UV-A COVERAGE AREA<br>at 15 in (38 cm)<br>at minimum 1,000 µW/cm <sup>2</sup> | VISIBLE LIGHT<br>MEASUREMENT |  |
|---------------------|---|---|------------------------------|--|
| OPX-365             | 18,000 μW/cm <sup>2</sup>   | 3 in (7.6 cm)<br>Diameter   | <2 foot-candles<br>(22 lux)  |  |
| Light Source:       |   | ● UV-A intensity reading taken with the Spectro-UV® AccuMAX <sup>™</sup>      |                              |  |
| Lamp Style:         | Cordless flashlight   | Series meter, and is factory set to the value shown.                          |                              |  |
| Lamp Head Diameter: | 2 in (5.1 cm)   |   |                              |  |
| Length:             | 8 in (20.3 cm)  |   |                              |  |
| Weight:             | 11.8 oz (335 g) (with Battery)                                      |   |                              |  |
| Power Requirements: | 3.6V, 2.0 Ah NiMH internal<br>battery stick (rechargeable)          |   |                              |  |
| Run Time:           | 90 minutes (continuous)   |   |                              |  |

#### OPX-365 **OPTIMAX<sup>™</sup> 365 Kit**


**Charge Time:** 

Comes complete with OPTIMAX<sup>™</sup> 365 (365 nm) lamp, smart AC and DC chargers, UV-absorbing spectacles, belt holder and hard carrying case. AC charger available in 120V, 230V, 240V or 100V versions.

Surface Contour Profile at 15 in (38 cm)

4 hours

#### UV-A Beam Profiles

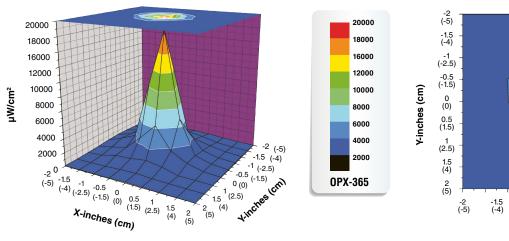

## SPECTRO-UV®

www.Spectro-UV.com 4 Dubon Ct., Farmingdale, NY 11735 866-230-7305



#### Top Intensity Profile at 15 in (38 cm)

