

MEETS STANDARDS FOR



EN ISO:3059

SPECTRO-UV®

OPTI-LUX™ 365 SERIES

LED UV-A Inspection Lamps

OLX-365 SERIES

Spot fluorescent indications in the smallest of spaces.



Rechargeable
Battery



Bright &
Uniform Beams



Instant-On
Operation



Small Space
Inspection

**CONVENIENT
ON/OFF SWITCH**
For easy one-handed
operation



**ULTRA
VIOLET
LED**

**ANODIZED ALUMINUM
LAMP BODY**

Minimizes corrosion and stands
up to years of heavy use



**CERTIFICATE OF
LIGHT OUTPUT**
included with lamp

AVAILABLE IN
4 MODELS:

High-Intensity & Standard-Intensity
both with and/or without UV-A pass filters

OPTI-LUX™ 365 OLX-365 SERIES

| MODEL | HIGH INTENSITY | STANDARD INTENSITY | CLEAR FILTER | INTERNAL BACK LIGHT FILTER | NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ① | VISIBLE LIGHT MEASUREMENT | UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 μW/cm² |
|------------|----------------|--------------------|--------------|----------------------------|---|----------------------------|---|
| OLX-365 | ● | | ● | | 10,000 μW/cm² | 0.8 foot-candles (8.6 lux) | 2 in (5 cm) |
| OLX-365B | ● | | | ● | 10,000 μW/cm² | 0.4 foot-candles (4.3 lux) | 2 in (5 cm) |
| OLX-365FL | | ● | ● | | 4,500 μW/cm² | 0.3 foot-candles (3.2 lux) | 2.5 in (6.3 cm) |
| OLX-365BFL | | ● | | ● | 4,500 μW/cm² | 0.2 foot-candles (2.1 lux) | 2.5 in (6.3 cm) |


Light Source: UV-A LED
Lamp Style: Cordless flashlight
Lamp Head Diameter: 1.25 in (3.2 cm)
Length: 5.9 in (15 cm)
Power Requirements: One 3.7V 2200mA/Hr lithium-ion battery (rechargeable)
Weight (w/Battery): 4.6 oz (130 g)
Run Time: 4 hours (continuous)
Charge Time: 4 hours (one or two batteries)
Charging Cradle: Two-battery capability with AC and DC cord sets*

① UV-A intensity reading taken with the Spectro-UV® AccuMAX™ Series meter, and is factory set to the value shown. 
 *(Also available in 100-120V, 230V & 240V versions)






OPTI-LUX™ 365 SERIES FLASHLIGHT KITS
 Come complete with OPX-365 LED UV-A (365 nm) lamp with lanyard, two rechargeable batteries, smart charging cradle with AC and DC cord sets, UV-absorbing spectacles, belt holder and a hard carrying case.

HIGH-INTENSITY UV-A Beam Profile

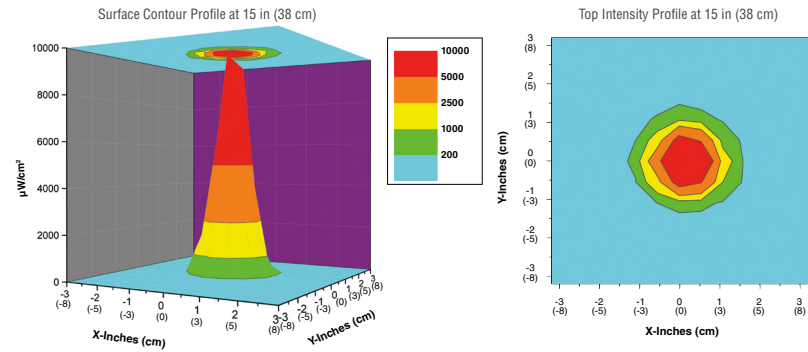

STANDARD-INTENSITY UV-A Beam Profile

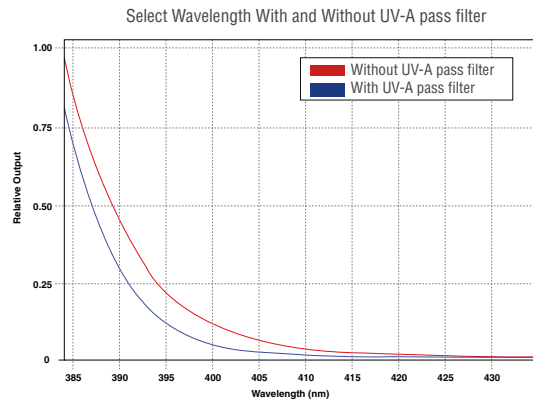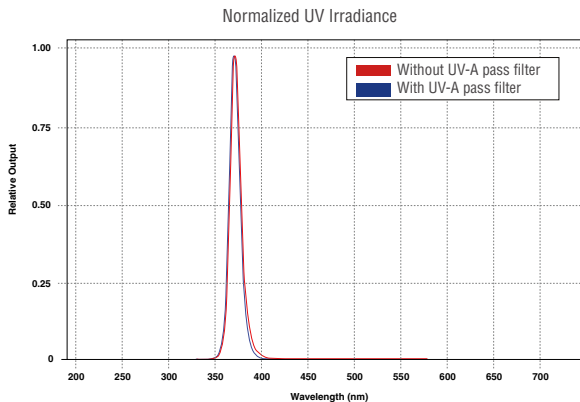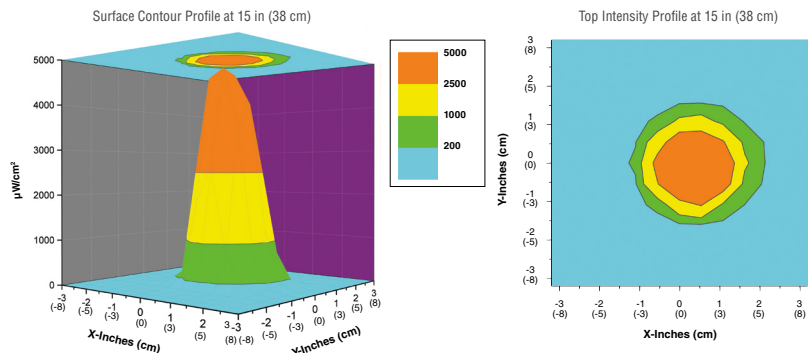

SPECTRO-UV®

www.Spectro-UV.com
 4 Dubon Ct., Farmingdale, NY 11735
 866-230-7305